




PV
 SV
 ALM1
 4 ALM2
 5 A-T
 6 OUT
 7 SET 3
 8
 9
 10



ALM1
 ALM2

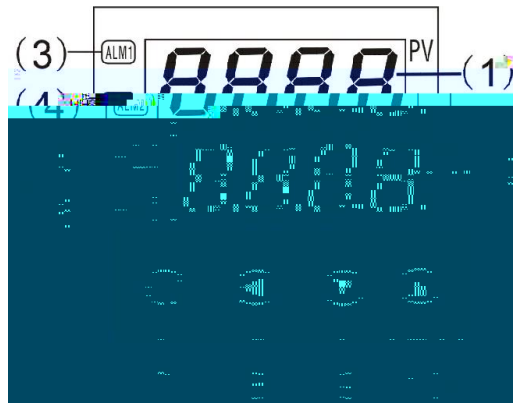

4-1

| | | | | | |
|---|----|--|-----------|--------------|----|
| | | | | | |
| 0 | SP | | P-SL P-SH | run=0 " " | 50 |

| | | | | | |
|----|------|--|-----------|---|-----|
| 1 | ALI | | P-SL P-SH | "ALP" 0.5 5 | 200 |
| 2 | AL2 | | 0-200 | | 0 |
| 3 | Pb | | ±20.0 | | 0.0 |
| 4 | P | | 1 5000 | KP P=0 4-1 | 100 |
| 5 | I | | 0 3000 | I | 500 |
| 6 | d | | 0 2000 | D " " 0 " " | 100 |
| 7 | | | 2 120 | PID 10 | 10 |
| 8 | FLt | | 0 50 | | 20 |
| 9 | HY | | 0.1 50.0 | | 0.5 |
| 10 | dP | | 0 3 | 0 1 0 3 dp=0 0000 dp=1 000.0 dp=2 00.00 dp=3 0.000 | 1 |
| 11 | outH | | outL 200 | | 200 |
| 12 | outL | | 0 outH | | 0 |
| 13 | At | | 0 1 | 0 1 " " | 0 |
| 14 | LoCt | | 0 50 | 0 1 | 0 |
| 15 | Sn | | — | 4-2 | 2 |
| 16 | oP-A | | 0 7 | 0 1 2 5 0 10mA 0 5V 6 | |

| | | | | | |
|-----|------|----|--------------|--------------------------------------|------|
| | | | | 3. 4-20mA | |
| 22 | Addr | | 0 255 | " " " " | 1 |
| 23 | bAud | | — | '0'1200 '1'2400 '2'4800 '3'9600 | 9600 |
| 25 | SEC | | 0 1 | 0 1 | 0 |
| 26 | Loop | | 0 1 | 0 1 | 1 |
| 27 | PdE | | 0 3 | 0 1 1 2 3 1 | 0 |
| 28 | AL-P | | 0 100.0 | AL_P, pv-sv >AL_P | 10 |
| 29 | run | | 0 3 | '0' SP '1' '2' '3' "7-2" | 0 |
| 30 | Pro | | 0 64 | | 1 |
| 31 | tE | | | RS485 | |
| 32 | rDI | 1 | 0-2000 | 0 run=1 pro=1 2000 | 10 |
| 33 | rDI | 1 | 0 9999 | 1 , 0 | 10 |
| 34 | COI | 1 | P-SL P-SH | 1 1 SPx, SP1 | 50 |
| 125 | r32 | 32 | | | |
| 126 | r32 | 32 | | | |
| 127 | r32 | 32 | | 32 32 SP32 | |


4-2

| | | | |
|--|-------------------|------------------|-------------------|
| | Cu50(L50) | Pt100(Pt 1) | Pt100(Pt 3) |
| | -50.0 150.0 | -199.9 200.0 | -199.9 600.0 |
| | K(L) -30.0 1300 | E(L) -30.0 700.0 | J(L) -30.0 900.0 |
| | T(L) -199.9 400.0 | S(L) -30 1600 | R(L) -30.0 1700.0 |




4-3

| | | | |
|--|-----------------------------|--------|--------|
| | KP=0; COOL=0; KP=0; COOL | =SP+HY | =SP-HY |
|--|-----------------------------|--------|--------|

1. 仪表常规操作

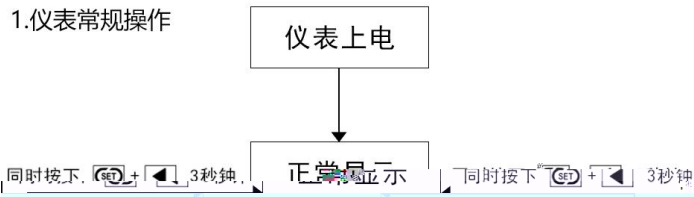

2. 程序段控制
状态按键操作

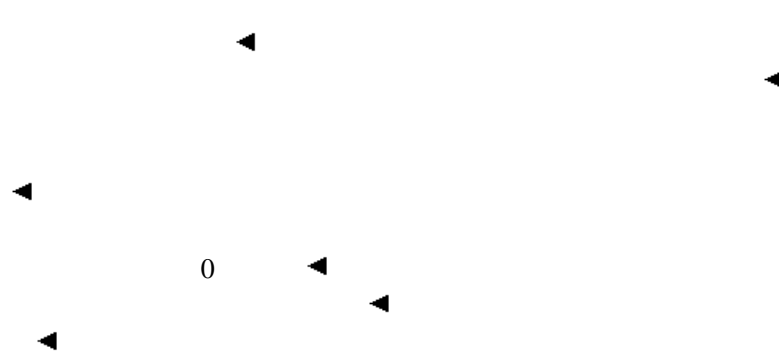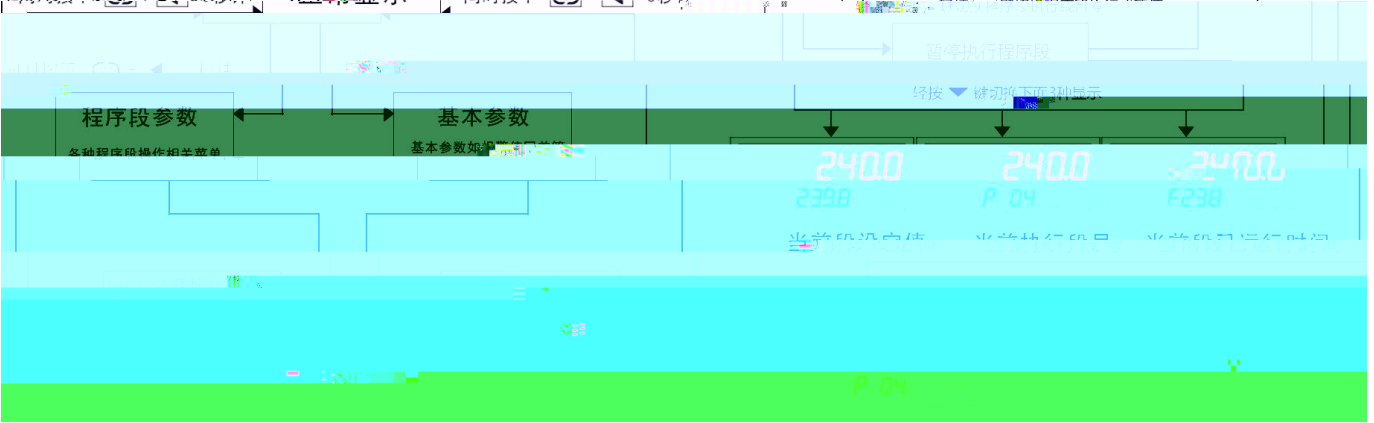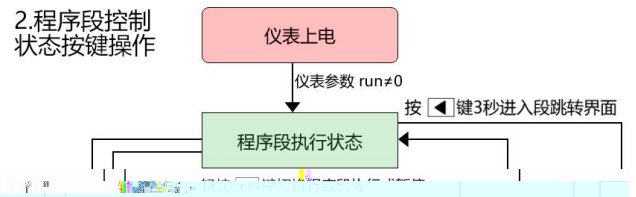

D

1.

K

2.

10%
"AT"


1

AT

"SP"

0.5
SV

P I

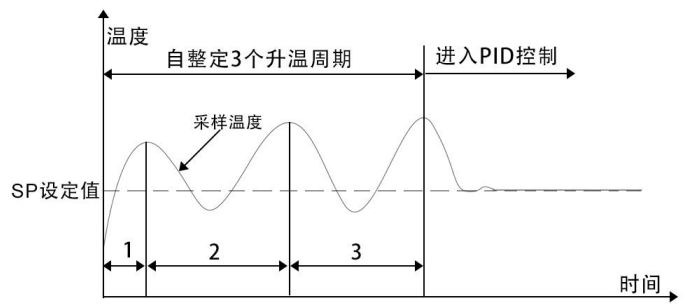

“AT”
P I D , ,AT , “AT” 0 PID




3.

| | | | |
|--|------|------|-----|
| | r01 | C01 | |
| | r01 | | |
| | r02 | C02 | |
| | ■■■■ | | |
| | r32 | C03 | r03 |
| | r04 | Loop | |
| | run | Pro | |

| | | |
|--------|----------------------------|----------------------------|
| ALP=1: | PV AL1 | PV<AL1-HY1 |
| ALP=2: | PV AL1 | PV>AL1+HY1 |
| ALP=4: | PV SP+AL1 | PV< SP+AL1-HY1 |
| ALP=5: | PV SP-AL1 | PV> SP-AL1+HY1 |
| ALP=7: | PV > AL1+SP PV < SP-AL1 | SP-AL1+HY1< PV <AL1+SP-HY1 |

PV SP AL1

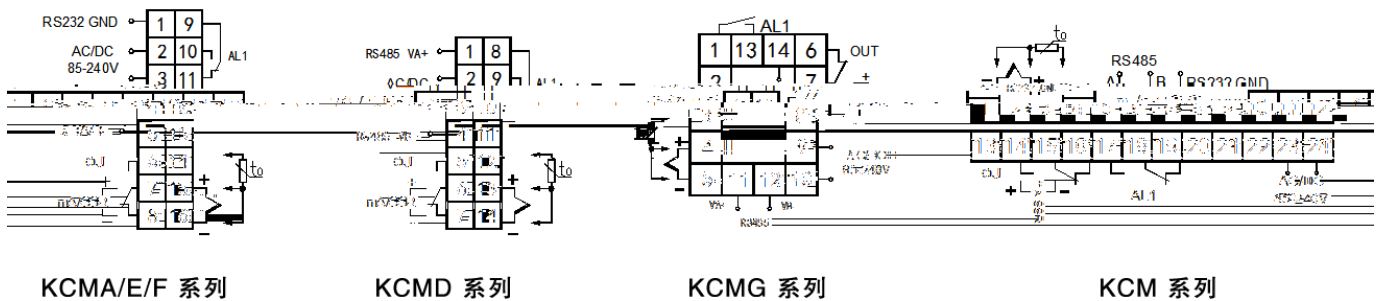


KCMA/E/F 系列

KCMD 系列

KCMG 系列

KCM 系列

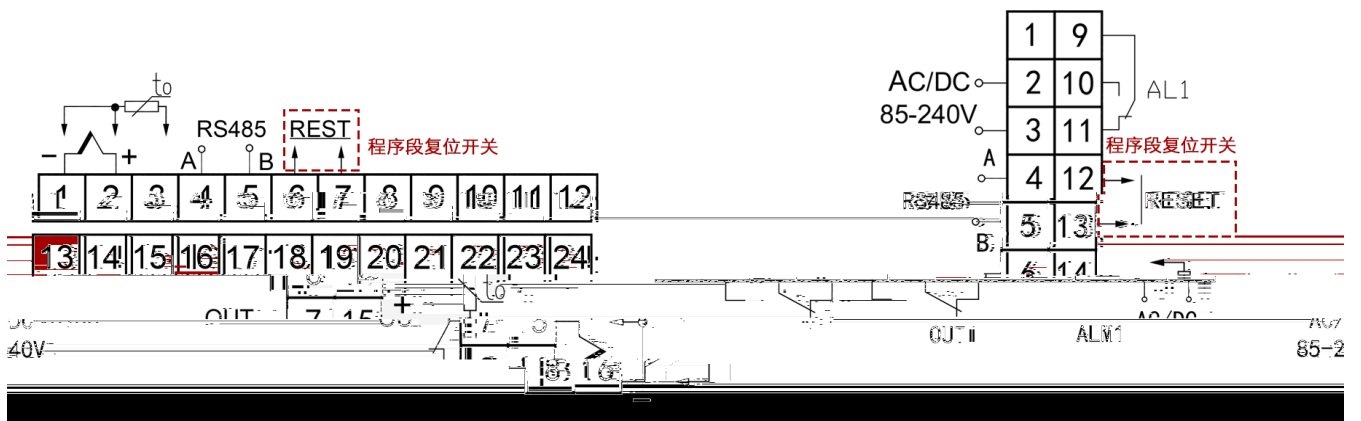

- 1. REST
- 2. REST

- 3.
- 4.

LOOP=1


LOOP=0

- 5.

1


如右图所示：

程序第1段和第2段有三个参数生成：即为R01,T01,C01

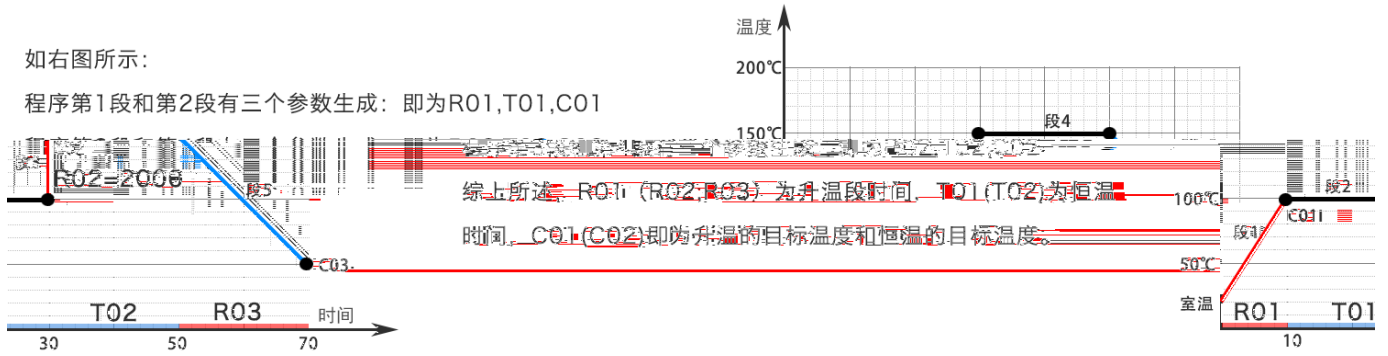

综上所述：R01 (R02; R03) 为升温段时间，T01 (T02) 为恒温时间，C01 (C02) 即为升温的目标温度和恒温的目标温度。

2

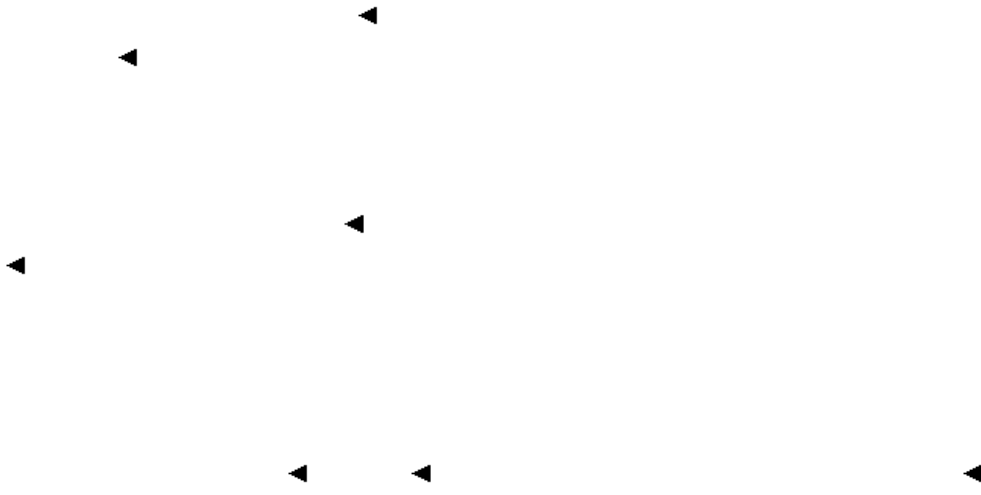


3

4-1

13-1

| | | |
|--|--|--|
| | | |
| | | |

| | | | | | | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|---|
| A | B | C | D | E | F | G | H | I | J | K | L | M |
| <i>R</i> | <i>b</i> | <i>l</i> | <i>d</i> | <i>E</i> | <i>F</i> | <i>G</i> | <i>H</i> | <i>I</i> | <i>J</i> | <i>P</i> | <i>L</i> |  |
| N | O | P | Q | R | S | t | U | Y | T | | | |
| <i>n</i> | <i>o</i> | <i>P</i> | <i>q</i> | <i>r</i> | <i>S</i> | <i>t</i> | <i>u</i> | <i>Y</i> | <i>T</i> | | | |

1

PC PLC RS485 RS232 255

2

1 1200 2400 4800 9600 1 8 1

2

1

| | | | | |
|------------------|-------|-------|-------|-------------------|
| | (03) | | 0001 | CRC16 |
| 010310010001D10A | | | | |
| 01 | 03 | 1001(|)0001 | 0001 D10A CRC CRC |
| www.tempinst.com | | | | |

2

| | | | | |
|----------------|----|-------|-------|----------|
| | | 2 | | CRC16 |
| 0103027FFFD834 | | | | |
| 01 | 03 | 02(2 |)7FFF | D834 CRC |
| 7FFF | 10 | 32767 | | |

3



126


| | | | | |
|------------------|-------|-------|-------|----------|
| | (06) | 00xx | | CRC16 |
| 0106000004EC8A87 | | | | |
| 01 | 06 | 0000(|)04EC | 8A87 CRC |
| 04EC | 10 | 1260 | 10 | 12.5 125 |

| (4-1) | | | |
|--------|-----|-------|-------|
| SP | YES | 0000H | 40001 |
| AL-1 | YES | 0001H | 40002 |
| | | | |
| C32 | YES | 007FH | 40128 |



第一步：修改仪表输入类型

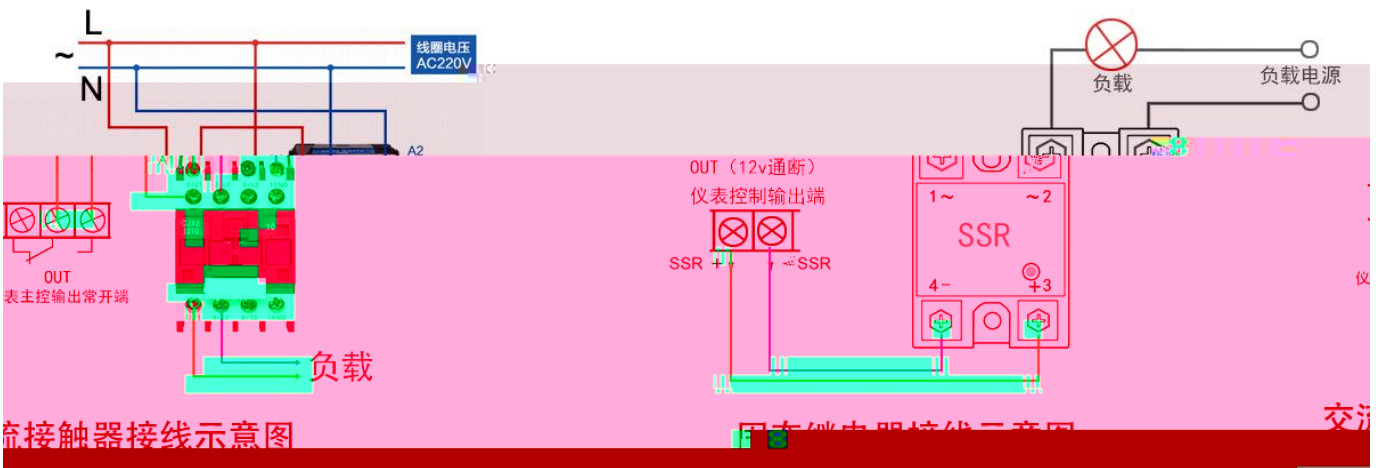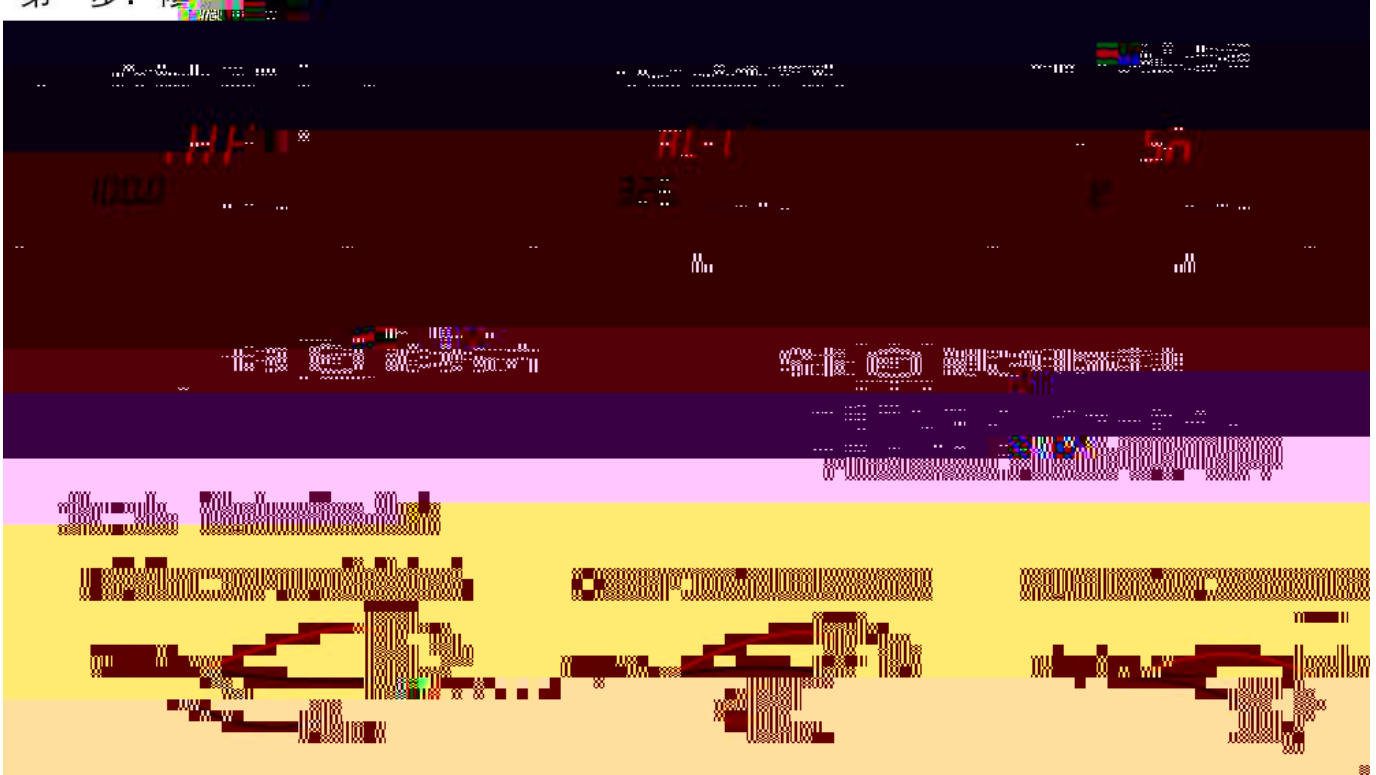

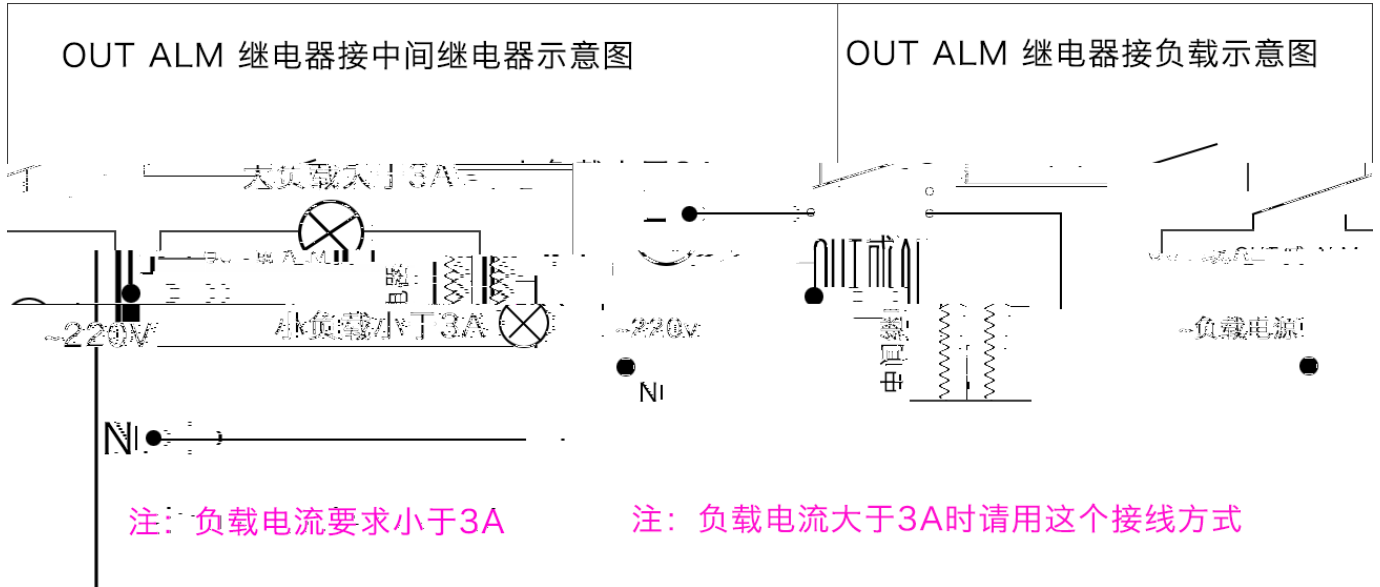

| | | | | | | | | |
|--|-----------------------------|---------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| | PID | | | | | | | |
| | KC | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | 160x80mm | :152x76mm() | M | | | | | |
| | 80x160mm | : 76x152mm() | MS | | | | | |
| | 96x96mm | :92x92mm | MA | | | | | |
| | 96x48mm | :92x44mm() | MF | | | | | |
| | 48x96mm | :44x92mm() | ME | | | | | |
| | 72x72mm | :68x68mm | MD | | | | | |
| | 48x48mm | :44x44mm | MG | | | | | |
| | 88x107x59mm DIN35 | | MR | | | | | |
| | PID | | | 9P | | | | |
| | 1 | | | | 1 | | | |
| | 2 (2) | | | | 2 | | | |
| | : K, E, J, R, S, T, WR25, N | | | | | : Pt100, Cu50 | W | |
| | 0-12v | | | | | | <input type="checkbox"/> | |
| | 4-20mA 0-10v | | | | | | G | |
| | | | | | | | A | |
| | 100 - 240V AC | | | | | | <input type="checkbox"/> | |
| | 24V DC | | | | | | 1 | |
| | RS-485(MODBUS-RTU) | | | | | | | RS |
| | RS-232(MODBUS-RTU) | | | | | | | RX |
| | 4-20mA | | | | | | | BS |

